


RESILIENT FLOOR SEALER

acry-seal™

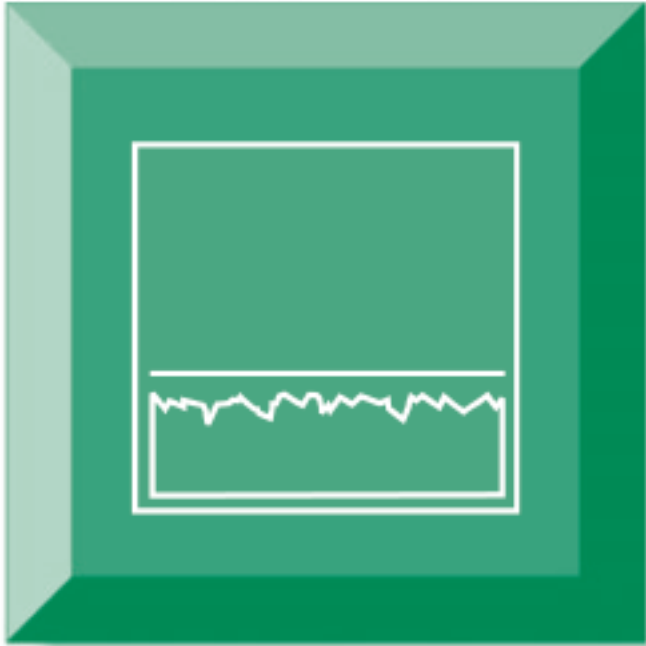

Description

Providing the basis for excellent results in floor care, this sealer penetrates and seals pores in resilient flooring prior to finish application. Easy to use, it enhances performances of most water based finishes. Non-yellowing for a long service life, this detergent resistant product is readily removed with a variety of strippers.

Features...Benefits

- Excellent Leveling Easy to Use
- Provides Extended Service Life . . Labor Saving
- Improves Overall Results Labor Saving
- Non-Yellowing Improved Appearance
- Low Odor Pleasant to Use

Directions For Use

Apply to clean, stripped floor in a uniform thin coat using a clean mop or applicator. Allow to dry 20-30 minutes and recoat. Allow to dry thoroughly before applying finish top coats.



1100 Central Industrial Drive
St. Louis, Mo 63110
1-800-325-9218
314-771-6600

E-Mail: info@interconchemical.com
www.interconchemical.com

Product Properties

COLOR (LIQUID): Milky White
COLOR (DRIED): Clear colorless
ODOR: Mild
pH: 10.0
FLASH POINT: None
SPECIFIC GRAVITY: 1.023
LEVELING: Excellent
COVERAGE: AVG. 1600 sq. ft./gal.

Safety Information

KEEP OUT OF REACH OF CHILDREN
CAUTION: Avoid contact with eyes and skin. In case of contact, rinse thoroughly. Do not take internally.