BLACK PIGMENTED FLOOR SEALER

basic black™

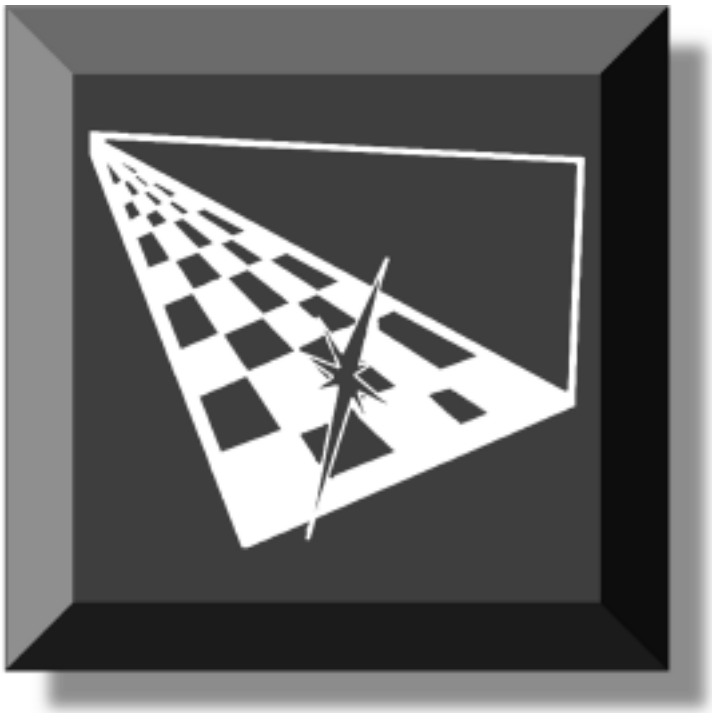

INTERCON™

1100 Central Industrial Drive
St. Louis, Mo 63110
1-800-325-9218
314-771-6600
E-Mail: info@interconchemical.com
www.interconchemical.com

Product Properties

COLOR:	Opaque Black
ODOR:	Characteristic
pH:	10
FLASH POINT:	None
SPECIFIC GRAVITY:	1.020
NON VOLATILE SOLIDS:	18.0%
LEVELING:	Excellent
COVERAGE:	AVG. 2000 sq. ft./gal.

Description

This premium quality sealer offers state-of-the-art performance as part of a multi-component system for black resilient floor maintenance. Its low odor, fast drying formula provides deep, dense, dark color for base coating. When top coated with our compatible clear finish, it provides high durability, flexibility and resistance to wear and degradation from water, detergents, traffic, scuffing and powdering. Easy to apply and maintain.

Features...Benefits

- Deep Dark Color . . . . .Restores Black Flooring
- Resists Abrasion . . . . . .Improves Flooring Service Life
- Low Odor . . . . . .Pleasant to Use
- Detergent Resistant . . . . . .Lasts Longer
- Seals Porous Floor Surfaces . . . . . .Improves Cleaning Efficiency

Directions For Use

Apply to clean, stripped floor in a uniform thin coat using a clean mop or applicator. Allow to dry (20 - 30 minutes) and recoat. Apply a minimum of 3 coats of finish to establish a sound base coating. Maintain using cleaners and buffing compounds as recommended.

Safety Information

KEEP OUT OF REACH OF CHILDREN

CAUTION. Avoid contact with eyes and skin. In case of contact, rinse thoroughly. Do not take internally.

040202-319

© INTERCON 2004

REFER TO PRODUCT LABEL AND MSDS FOR ADDITIONAL INFORMATION